


# EIKIShare L2

Wireless Screen Collaboration System  
A must-have tool for business travel.



EIKIShare L2 Wireless Receiver. Compact receiver with dual output via HDMI and USB (for Windos). Support Miracast & Airplay Direct without Wi-Fi, hotspot, or app. Plug-and-play for business trips, office displays, and small meeting rooms.

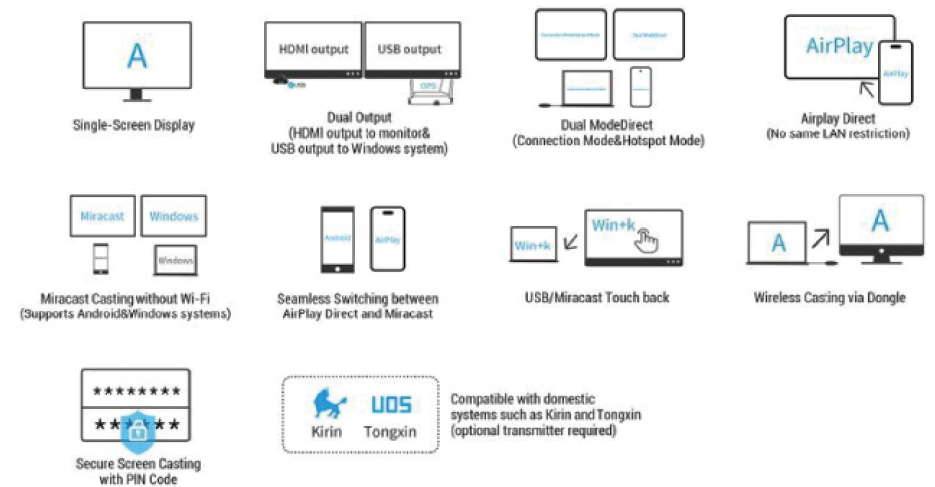

The EIKIShare L2 supports wireless screen projection (Airplay, Miracast), and projection from a screen transmitter, with two modes to choose from (P2P direct connection mode, AP hotspot mode). It can output video via USB and HDMI interfaces. The USB interface can connect to Windows computers to output video (requires the use of Windows software), and the HDMI interface can connect to monitors to output video.

## Hardware Parameters

- Interface:**
- HDMI 1.4/USB-A 2.0.
- Number of connections:**
- Maximum 8 connections. For more than 8 connections, an external wifi AP is required.
- Power Consumption:**
- Input: DC 5V, Maximum consumption: 2.5W.
- Weight:**
- 26g. (#2g)
- Dimensions:**
- Product: 90mm x 33mm x 12mm (#2mm)
  - Packaging: 208mm x 108mm x 32mm (#2mm)
- Operating Environment:**
- Operating Temperature: 0°C to 40°C.
  - Storage Temperature: -10°C to 60°C.
- Indicator Light:**
- Blue.

## Light Indications

- Blue Lamp Status::**
- Flashing: means "Pairing" or "Connecting".
  - Steady: means "Paired" or "Connected".

## System Parameters

- Transmission Delay:**
- 50-150ms.
- Output Resolution:**
- 1080P.
- Frame Rate:**
- 1080P: 60Hz.
- Operating System:**
- Windows 7/8/10/11, Mac OS 10.11+, iOS 10.9+, Android 5.0+.
- Display Mode:**
- Supports extended desktop(Windows 7/8/10/11, Mac OS 10.11+).
- Wi-Fi:**
- 5G
- Encryption:**
- AES.
- Authentication Protocol:**
- WPA2-PSK.
- Transmission Distance:**
- Up to 8m (without obstructions).
- Operation Mode:**
- P2P mode, AP hotspot mode.